

## ZEISS Distagon T\* 2/25





### **Features**

- Fast f/2.0 aperture
- Precise manual focusing
- Robust full-metal construction
- Identical color reproduction of all models
- For industrial cameras with F-Mount up to sensor sizes of 24x36 mm or 43mm line sensors.

#### **ZF-I: Industrial Edition**


Features special screws to fix focus and aperture settings even in rough situations.

#### **Camera Mounts**

Available for other camera mounts such as EF, or M42 screw mount.



### **Technical Specifications**

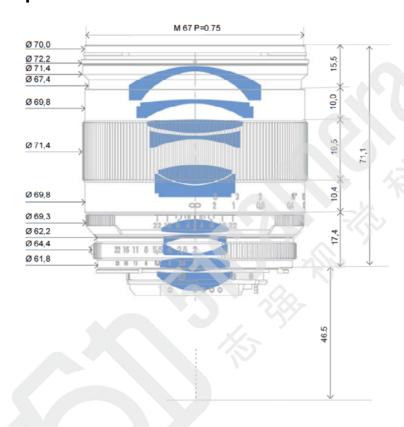


Focal length	25 mm
Aperture range	f/2 — f/22 (1/ 2 stop intervals)
Number of elements / groups	11 / 10
Min. working distance (object to sensor)	250 mm (0.83 ft.) – ∞
Min. free working distance	130 mm (0.43 ft.) – ∞
Angular field* (diag. / horiz. / vert.)	81 / 71 / 21°
Max. diameter of image field	43 mm (1.7")
Flange focal length	F-Mount: 46.5 mm (1.8"); M42-Mount: 45,5 mm
Coverage at close range	219 x 144 mm (8.6 x 5.6"), line 253 mm (9.9")
Image ratio at close range	1:5.9
Filter-thread	M 67 x 0.75
Weight	570 g (1.26 lbs.)
Camera mount	F bayonet, M42, EF

<sup>\*</sup> referring to 35 mm format



### **Relative Illuminance\***

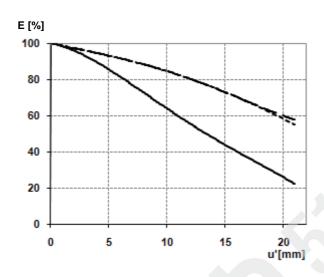


The relative illumination shows the decrease in image brightness from the image center to the edge in percent.

 $_{\rm f-number} = 2.0$ 

 $\dots$ f-number = 4.0

---f-number = 5.6

### **Relative Distortion\***

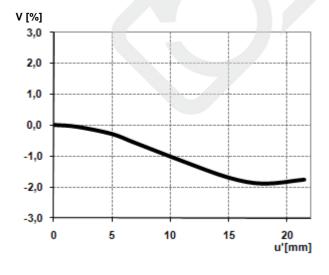


The relative distortion shows the deviation of the actual image height from the ideal one in percent.

<sup>\*</sup>Data for infinite focus setting




### MTF Charts\*

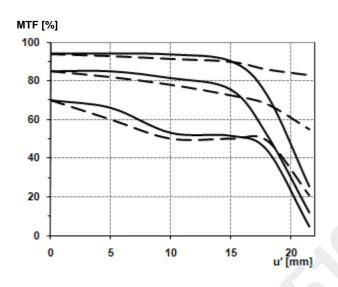

The Modulation Transfer (MTF) as a function of image height (u) and slit orientation (sagittal, tangential) has been measured with white light at spatial frequencies of R=10, 20 and 40 cycles/mm.


f-number = 2.0

\_\_ Sagittal ... Tangential

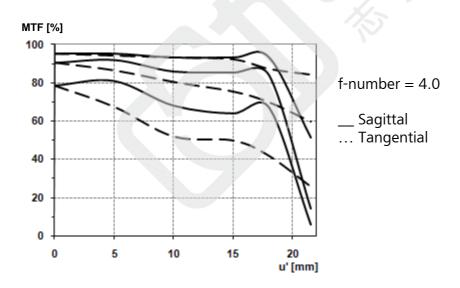

\*Data for infinite focus setting



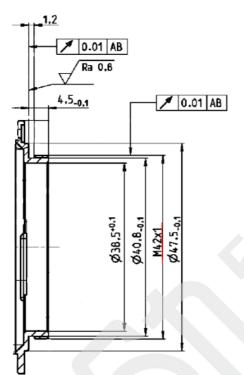

M42 Mount for 45,5 mm Flange Focal Distance

The diameter of the camera/lens adapter must not exceed 55 mm at the lens side!