

Line Lights LND2 Series

Instruction Guide



Thank you for purchasing a CCS product. To ensure proper use of the product, please read this instruction guide before use and keep it for your future reference.

1 Important Information for Equipment Safety - Read Before Use -

This product has been designed with full consideration of safety. Incorrect usage of the product may result in fire, electric shock, or other serious damages. Please ensure to follow the conditions below.

The following symbols are used in this instruction guide to indicate and classify the relative importance of warnings and cautions.

	Warning	Indicates that incorrect usage may result in serious injury or death.		Caution	Indicates that incorrect usage may result in injury or property damage.
--	---------	---	--	---------	---

The following symbols in the instruction guide indicate and classify the precautions.

	Prohibited		Disassembly Prohibited		Do Not Touch With Wet Hands		Do Not Subject To Moisture
These symbols mean the prohibited action.							
				This symbol means the necessary action must obey.			

Warning	
Do not disassemble or modify the product. Doing so may result in fire or electric shock.	
Do not touch the product with wet hands. Doing so may result in electric shock.	
Make sure that the product is free of moisture or any liquid. Exposure to water may result in fire, electric shock, or product failure.	
Connect or disconnect the light cable only after turning off the LED light. Failure to do so may result in circuit damage, fire caused by a minute spark, or electric shock.	
LED light radiation may cause corneal or retinal abnormalities if you look directly at the light. To prevent harmful light exposure, never look directly at the LED light.	
This product generates high temperatures. Do not touch the product while it is turned on or immediately after it is turned off, or burning may result. Provide cooling with a fan or other ventilation if the product is to be used in a closed space.	
If abnormal condition occurs such as fuming, heat, smell, noise, or so on, stop using the product immediately, and turn off the power source. A fire or electric shock may result if the product is kept used.	

Caution	
Do not use user-made cables. Doing so may cause product failure. Use the CCS extension cable if it is necessary to extend the distance between the light and the control unit.	
Be careful of static electricity. Damage to the LED light may occur, if a person charged with static electricity touches it. Keep the product away from all items charged with static electricity.	
Do not drop the product or subject it to impact. Doing so may cause the product to malfunction.	
Use a control unit that is suitable for the product ratings. Using an incorrect control unit can cause product failure.	
Use a standard Extension Cable that is manufactured by CCS. If the cable is too long, the voltage across the Bar Light will drop due to the DC resistance of the cable, and the light intensity will decrease.	

Do not use the product in the following situations.


- Under conditions or in an environment not described in this instruction guide.
- In nuclear energy control systems, railroad systems, aviation systems, vehicles, combustion equipment, medical equipment, amusement machines, or safety equipment.
- In applications involving serious risk to life or property, particularly applications demanding a high level of safety.

Please install the product to locations with following conditions. Incorrect installation location may cause product failure.

- In a flat and stable location with minimal vibration.
- Well-ventilated places with minimal dust.
- Places that are not subject to sudden temperature changes.
- Places free from any water, oil, liquid, chemical, or steam.
- Places free from corrosive or combustible gas.
- Places away from water faucets, boilers, humidifiers, air conditioners, heaters, or stoves.


2 Confirming Product Information

The following tag is attached to the cable on the LED Light. The color of the label indicates the luminescence color of the Light. The back of the tag there is a name label that gives the model number, power consumption, and serial number. Be sure to check the contents before using the product and handle the label with care. If the label is missing or damaged and the contents cannot be checked, please contact CCS Inc.

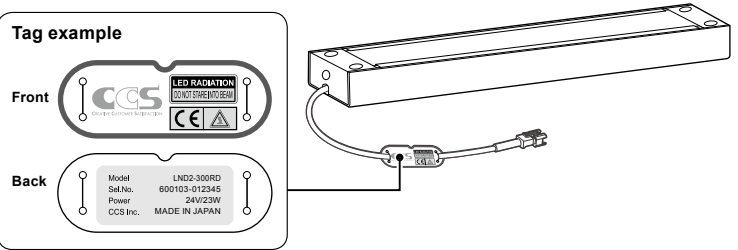


3 Installation

Installation on a Frame

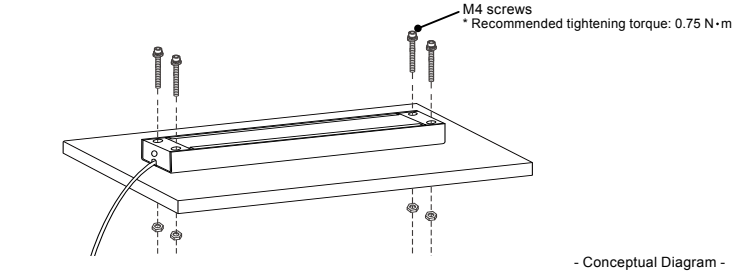

4 Operating Instructions

- Connect the light cable of the product to the control unit. The type of the cable connector depends on the length of the light emitting surface. Connect the light cable to the control unit equipped with the corresponding power output connectors:
 - If the light emitting surface of the Light is 300 to 600 mm, connect to the control unit equipped with **SMP-03V-BC** Connectors for power output.
 - If the light emitting surface of the Light is 900 to 1200 mm, connect to the control unit equipped with **ELR-02V** Connectors for power output.

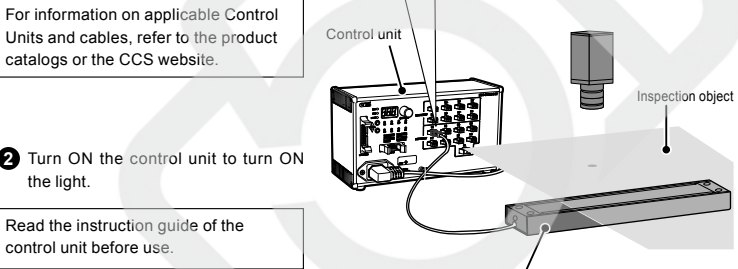

- Adjust light range, light angle, and radiant quantity to optimize images.

When using white LED lights with color image processing equipment, readjust the white balance of the camera according to the operating conditions.

Efficient Use of LED Lights

LED lights generate heat that decreases radiant quantity and speeds degeneration. Follow the instructions below in order to suppress the heat of LED lights and prevent decreases radiant quantity and speeds degeneration.

- Use the light with the light level turned as low as possible.
- Turn ON the light unit only when taking images.
- Installing a fan or providing air flow for heat dissipation.

5 Main Specifications

Common Specifications


Input voltage	24V DC
Cable length	300mm
Cooling method	Natural air-cooling
Operating environment (indoors only)	Temperature: 0 to 40°C, Humidity: 20 to 85%RH (with no condensation)
Storage Environment	Temperature: -20 to 60°C, Humidity: 20 to 85%RH (with no condensation)
CE Marking	Safety standard: Conforms to EN62471
Environmental regulations	RoHS compliant
Case material	Aluminum alloy, POM, PMMA(Diffuser)

Specifications by Model

Model	LED color*	Emitting surface length	Power consumption (max.)	Weight (max.)	Connector	Polarity
LND2-300RD	Red	301mm	23W	200g	SMR-03V-B	1: (+) 2: NC 3: (-)
LND2-300SW	White		18W			
LND2-600RD	Red	603mm	46W	360g	ELP-02V	1: (+) 2: (-)
LND2-600SW	White		35W			
LND2-900RD	Red	903mm	69W	505g		
LND2-900SW	White		53W			
LND2-1200RD	Red	1203mm	91W	670g		
LND2-1200SW	White		70W			


* Red:Peak wavelength(typ.) is 630nm. White:Correlated color temperature(typ.) is 5500K.

Light Intensity Setting and Light Output Characteristic (reference)

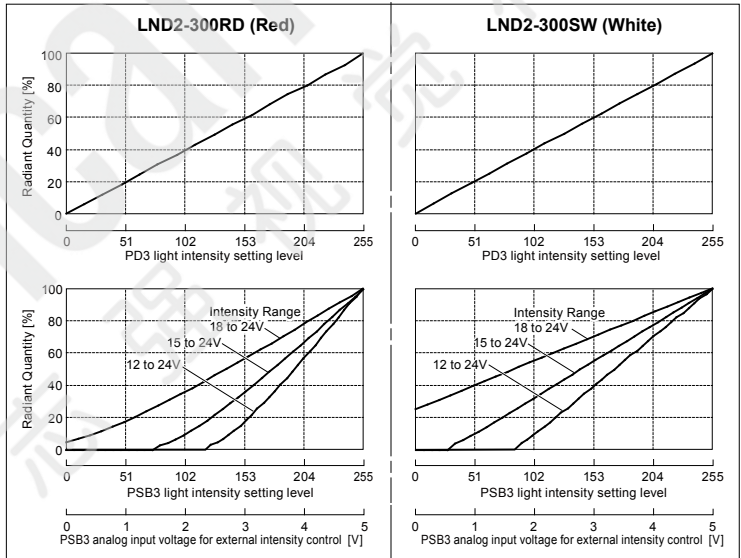

*Measured value with LND2-300SW/RD (values are not guaranteed).

6 Dimensional Diagrams (mm)

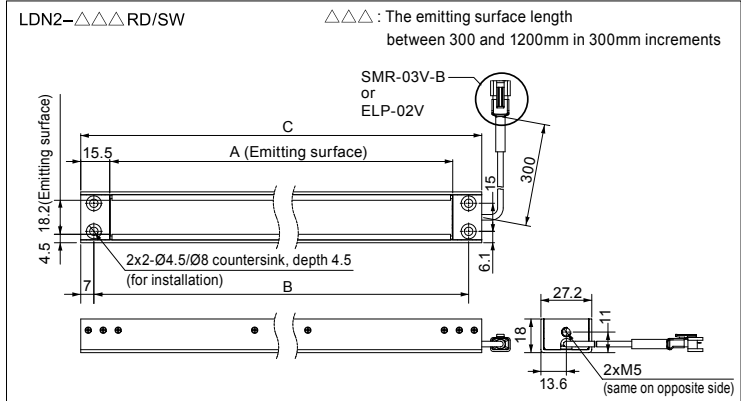

Dimensions by Model

Model	A	B	C
LND2-300RD	301mm	318mm	332mm
LND2-300SW			
LND2-600RD	603mm	620mm	634mm
LND2-600SW			
LND2-900RD	903mm	920mm	934mm
LND2-900SW			
LND2-1200RD	1203mm	1220mm	1234mm
LND2-1200SW			

7 Environmental Regulation

EU RoHS Directive

The RoHS Directive is short for the "restriction of use of certain hazardous substances in electrical and electronic equipment." As a directive, it restricts the use of specific hazardous substances for new electrical and electronic equipment marketed in the EU on or after July 1, 2006, and restricts the use of six substances, which are (1) lead, (2) mercury, (3) cadmium, (4) hexavalent chromium, (5) polybrominated biphenyl (PBB), and (6) polybrominated diphenyl ether (PBDE).

*Standards for "RoHS Directive-Compliant Products"

Lead	Mercury	Cadmium	Hexavalent chromium	PBB	PBDE
1000ppm max.	1000ppm max.	100ppm max.	1000ppm max.	1000ppm max.	1000ppm max.

(Items that are exempted in the RoHS Directive are excluded from these standards.)

China RoHS Directive

China RoHS Directive is formally known as "Management Methods for Controlling Pollution by Electronic Information Products", which was implemented on March 1, 2007 in China. Same as EU RoHS Directive, this regulation restricts the usage of six substances such as lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyl (PBB), and polybrominated diphenyl ether (PBDE). This regulation requires electronic information products which are manufactured or imported, and sold in China, to clearly disclose contents of the 6 restricted substances listed below.

Name and amount of toxic and hazardous substances or elements							
Usage Deadline for Environmental Protection	Product name	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent chromium (Cr(VI))	PBB	PBDE
	LED Lights	×	○	×	○	○	○
○: Indicates that this toxic or hazardous substances contained in all the homogeneous materials for this part, according to SJ/T11363-2006 is within the limit requirement. ×: Indicates that this toxic or hazardous substance contained in all the homogeneous materials for this part, according to SJ/T11363-2006, is over the limit requirement. *Lead and cadmium are excluded in EU RoHS.							

Usage deadline for environmental protection
The number used in this logo is based on "Management Methods for Controlling Pollution by Electronic Information Products" and related regulations from People's Republic of China. It shows the product usage duration in years for environmental protection. After finishing a product usage, the product needs to be re-used or discarded appropriately following local law and regulations, complying with safety and usage caution.

产品中有害有害物质或元素的名称及含量							
环保使用期限	产品	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
	LED 照明	×	○	×	○	○	○
○: 表示该有毒有害物质在该部件所有均质材料中的含量均在 SJ/T11363-2006 标准规定的限量要求以下。 ×: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 SJ/T11363-2006 标准规定的限量要求。 (注) 铅和镉中的 "×", 因欧洲 RoHS 没限定, 故用 "○" 表示。							
环保使用期限 此标志的数字是根据中华人民共和国电子信息产品污染控制管理办法以及有关标准等, 表示该产品的环保使用期限的年数。 遵守产品的安全和使用上的注意, 在产品使用后采取适当的方法根据各地法律, 规定, 回收再利用或进行废弃处理。							

Warranty Information

EXCEPT FOR THE EXPRESS WARRANTIES STATED IN THIS DOCUMENT, CCS MAKES NO ADDITIONAL WARRANTIES, EXPRESS, IMPLIED, OR STATUTORY, AS TO ANY MATTER WHATSOEVER. IN PARTICULAR, ANY AND ALL WARRANTIES OF MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. EXCEPT AS EXPRESSLY SET FORTH HEREIN, CCS MAKES NO WARRANTIES WITH RESPECT TO THE PRODUCTS.

WARRANTY PERIOD: TWO YEARS (ONE YEAR FOR RADIANT QUANTITY), STARTING FROM CCS Inc. SHIPPING DATE.

CCS Inc. WILL REPAIR OR REPLACE THE PRODUCT FREE OF CHARGE IF IT SHOULD FAIL TO FUNCTION OR IF THE RADIANT QUANTITY OF THE PRODUCT SHOULD DROP TO 50% OR LESS OF ITS INITIAL RADIANT QUANTITY WITHIN THE SPECIFIED WARRANTY PERIOD. IF EITHER OF THESE CONDITIONS OCCURS, PLEASE TAKE THE PRODUCT TO YOUR CCS SALES REPRESENTATIVE.

WARRANTY TERMS

- CCS Inc. WILL REPAIR OR REPLACE THE PRODUCT FREE OF CHARGE IF IT SHOULD FAIL TO FUNCTION UNDER USE ON OUR SPECIFIED CONDITION IN ACCORDANCE WITH THE INSTRUCTION GUIDE AND OTHER WRITTEN CAUTIONS DURING THE INDICATED WARRANTY PERIOD OF TWO YEARS.
- CCS Inc. WILL REPAIR OR REPLACE THE PRODUCT FREE OF CHARGE IF ITS RADIANT QUANTITY SHOULD DROP TO 50% OR LESS OF ITS INITIAL RADIANT QUANTITY UNDER USE ON OUR SPECIFIED CONDITION IN ACCORDANCE WITH THE INSTRUCTION GUIDE AND OTHER WRITTEN CAUTIONS DURING THE INDICATED WARRANTY PERIOD OF ONE YEAR.
- CCS Inc. WILL CHARGE A REPAIR FEE UNDER THE FOLLOWING CONDITIONS:
 - IF THE PRODUCT HAS BEEN SUBJECTED TO MISUSE, UNAUTHORIZED REPAIRS, OR MODIFICATION FROM ITS ORIGINAL DESIGN.
 - IF THE PRODUCT HAS BEEN DAMAGED FROM IMPACTS DUE TO INAPPROPRIATE HANDLING.
 - IF DAMAGE TO THE PRODUCT RESULTS FROM EXTERNAL CAUSES INCLUDING ACCIDENTS, FIRE, POLLUTION, RIOTS, COMMUNICATION FAILURES, EARTHQUAKES, THUNDERSTORMS, WIND AND FLOOD DAMAGE, OR ANY OTHER ACT OF PROVIDENCE, OR FROM ANY EXTRAORDINARY CONDITIONS SUCH AS ELECTRICAL SURGES, WATER LEAKAGE, CONDENSATION, OR THE USE OF CHEMICALS.
 - IF THE DAMAGE RESULTS FROM CONNECTION TO ANY CONTROL UNIT OR TO ANY EQUIPMENT WHICH CCS Inc. DOES NOT MANUFACTURE OR DOES NOT SPECIFY FOR USE.
- CCS ASSUMES NO LIABILITY FOR ANY PURCHASER'S SECONDARY DAMAGE (DAMAGE OF EQUIPMENT, LOSS OF OPPORTUNITIES, LOSS OF PROFITS, ETC.) OR ANY OTHER DAMAGE RESULTING FROM A FAILURE OF OUR PRODUCT.

THIS WARRANTY INFORMATION PROVIDES THE SCOPE OF CCS'S PRODUCT WARRANTY WITHIN THE SPECIFIED PERIOD, AND DOES NOT INDICATE OR IMPLY ANY FURTHER GUARANTEE BEYOND THE WARRANTY TERMS.

CONTACT CCS FOR INQUIRIES OR INFORMATION ON REPAIRS TO THE PRODUCT AFTER THE EXPIRATION OF THE WARRANTY.

NOTE: THE RADIANT QUANTITY REFERS TO THE WATTAGE OF PHYSICAL ENERGY RADIATED FROM A LED. IT REFERS TO THE RADIATION LUMINOSITY OF THE LED MEASURED UNDER CONDITIONS SPECIFIED BY CCS OR THE RADIATION ILLUMINATION OF THE LED UNDER SPECIFIED IRRADIATION CONDITIONS. CCS SPECIFIES THE RADIANT QUANTITY FOR EACH LED LIGHT BECAUSE THE MEASUREMENT AND IRRADIATION CONDITIONS VARY FROM THE FORM, THE APPLICATION AND THE IRRADIATION WAVELENGTH.

- Contents of this Instruction Guide may be changed without prior notice.
- Illustrations used in this Instruction Guide may differ from actual products.
- CCS maintains the copyright on this Instruction Guide. Unauthorized transfer or reproduction is strictly prohibited.

Instruction Guide and Dimensional Diagrams in PDF or CAD can be downloaded from the CCS website. <http://www.ccs-grp.com/>

Ask any product queries to the following address or to your nearest CCS representative.

CCS Inc.

Headquarters Shimodachiuri-agaru, Karasuma-dori, Kamigyo-ku, Kyoto 602-8011 Japan
Phone : +81-75-415-8284 Fax : +81-75-415-8278 E-mail : intisales@ccs-inc.co.jp
Use our website to find your nearest CCS representative. <http://www.ccs-grp.com/mvad/>

Copyright© 2012 CCS Inc. All Rights Reserved.
Descriptions in this instruction guide are based on information available as of March 2012. KZ04573-T001-000