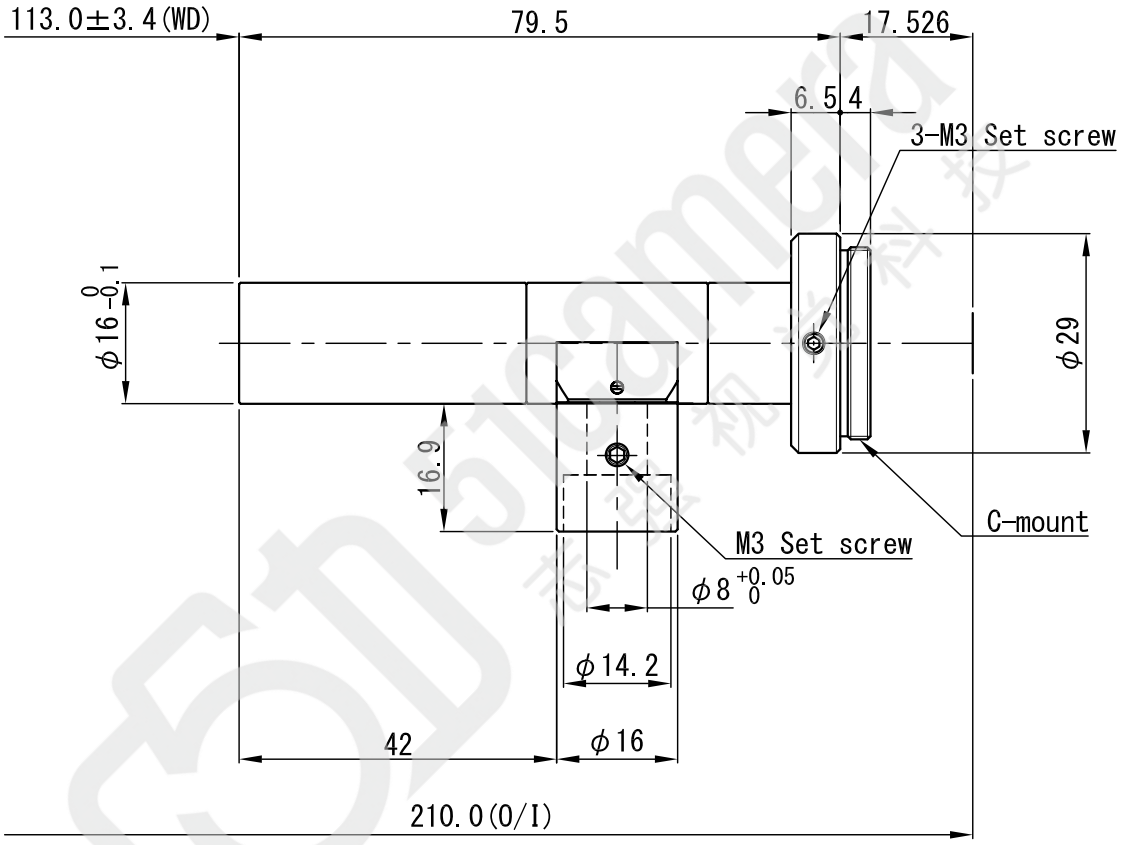


| | | | | APPROVED | CHECKED | MATERIAL 材料 | – | CHAMFER 一般面取 | – | QUANTITY 個数 |
|---|---|---|---|---|---|---|---|---|---|---|
| △ | | | | T.A. | T.A. | TREATMENT 処理 | – | FINISHING 仕上 | – | – |
| △ | | | | | | TREATMENT CONTACT 処理接点 | – | DECENTRATION 偏芯 | – | |
| △ | | | | DESIGNED | DRAWN | UNIT(mm) | ANGLE 角度 | METHOD 図法 | REMARK 適用（機種名） | |
| △ | | | | T.A. | S.K. | | – | | APT1-110C | |
| | DATE | EXCH NO. | REVISION 変更記事 | | | SCALE | 1 / 1 | NAME | 外観図 | |
| | | | | | | DATE | '14.03.12 | DRAW NO. | ODTC0529A1 | |

| TOLERANCES | A | B | C | S |
|---|---|---|---|---|
| OVER 250 UP TO 1000 | ±0.3 | ±0.5 | ±1.0 | ±0.2 |
| OVER 63 UP TO 250 | ±0.2 | ±0.3 | ±0.6 | ±0.15 |
| OVER 16 UP TO 63 | ±0.1 | ±0.2 | ±0.4 | ±0.1 |
| OVER 0 UP TO 16 | ±0.05 | ±0.1 | ±0.2 | ±0.1 |