


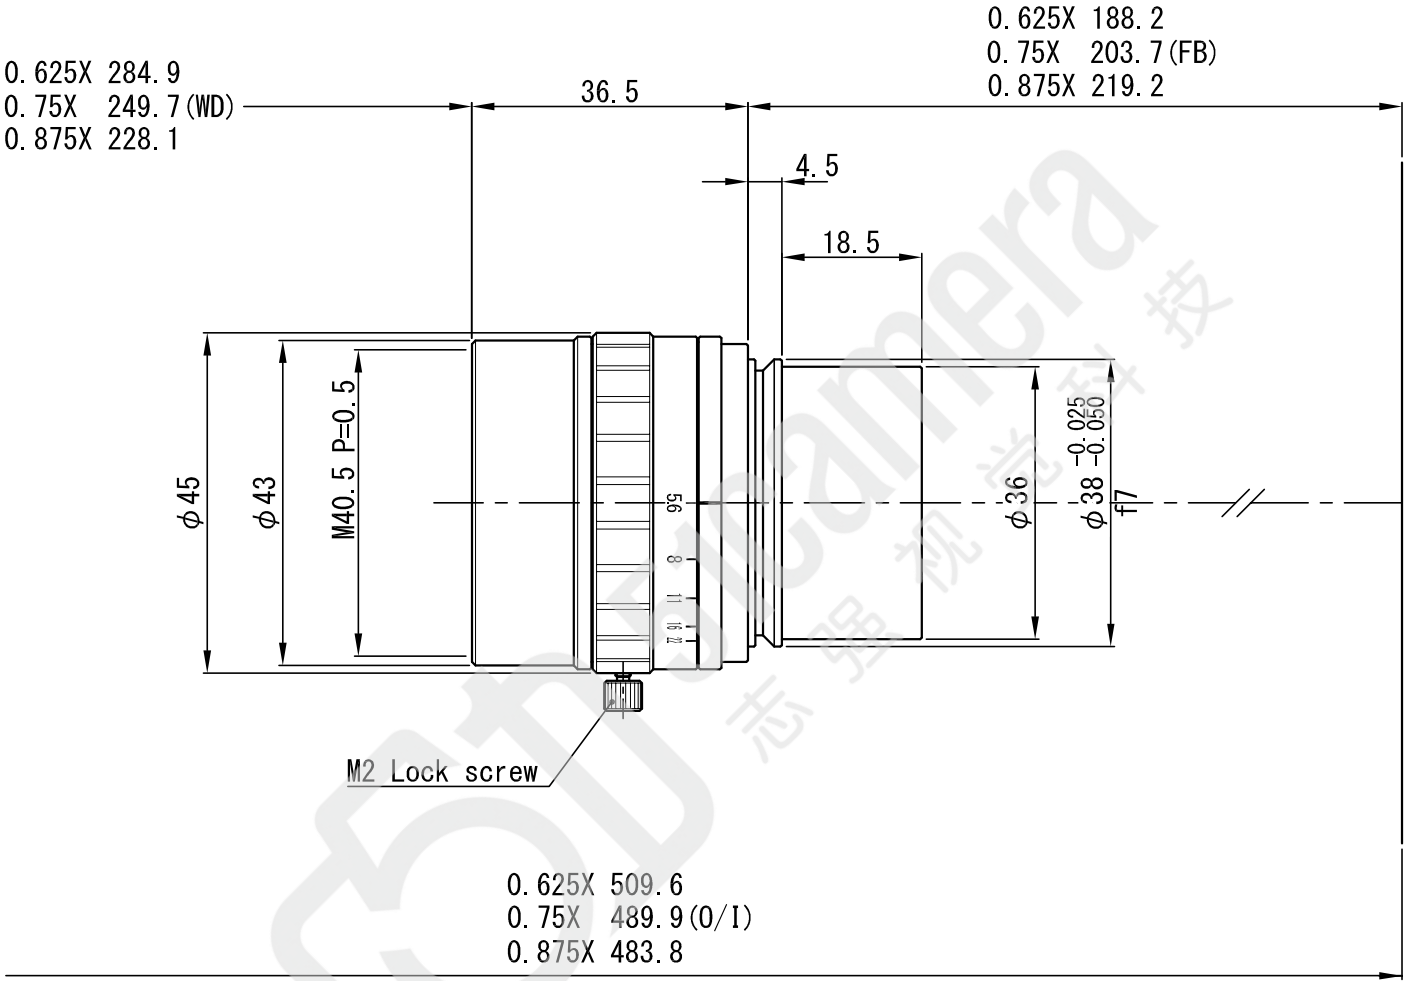

|   |      |          |               |          |         |                        |                      |                 |           |                 |
|---|------|----------|---------------|----------|---------|------------------------|----------------------|-----------------|-----------|-----------------|
| △ |      |          |               | APPROVED | CHECKED | MATERIAL 材料            | —                    | CHAMFER 一般面取    | —         | QUANTITY 个数     |
| △ |      |          |               | T. A.    | T. A.   | TREATMENT 处理           | —                    | FINISHING 仕上    | —         | —               |
| △ |      |          |               |          |         | TREATMENT CONTACT 处理接点 | —                    | DECENTRATION 偏芯 | —         |                 |
| △ |      |          |               | DESIGNED | DRAWN   | OVER 250 UP TO 1000    | ±0.3 ±0.5 ±1.0 ±0.2  | ANGLE 角度        | METHOD 图法 | REMARK 適用 (機種名) |
| △ |      |          |               |          |         | OVER 63 UP TO 250      | ±0.2 ±0.3 ±0.6 ±0.15 | —               |           | VS-L12056-075/V |
| △ |      |          |               | T. A.    | T. T.   | OVER 16 UP TO 63       | ±0.1 ±0.2 ±0.4 ±0.1  | SCALE           | NAME      | 外觀図             |
| △ |      |          |               |          |         | OVER 0 UP TO 16        | ±0.05 ±0.1 ±0.2 ±0.1 |                 |           |                 |
|   | DATE | EXCH NO. | REVISION 変更記事 |          |         | TOLERANCES             | ① B C S              | DATE            | DRAW NO.  | 01D1M1C0229A11  |