

Lm070 & Lm075

VGA Mini USB 2.0 Camera



High Speed Global Shutter CCD

Lumenera's Lm075 digital camera is designed to be a compact, cost-effective, versatile solution for machine vision, 3D biometrics and real time video. Producing 60 video frames per second (fps) at full resolution combined with superior sensitivity, this camera provides immediate video feedback in to the most light challenging applications. Add to this a fully global electronic shutter, which looks and feels of a mechanical shutter, that can capture images of high speed motion with little to no blur and this camera provides many of the features needed for real time applications where instant feedback is a must.

100+ Frame Per Second

This camera utilizes its high quality CCD sensor to its maximum by providing vivid color images. Full streaming of uncompressed video along with still image captures are easily controlled through a set of stable and reliable USB device drivers. Region of interest and binning modes allow the camera to run at faster frame rates (100+ fps at 320 x 240 resolution) while only providing the image data you need. Image capture synchronization is achievable using either a hardware or software trigger and is complemented by 32 MB of on board memory for frame buffering to ensure delivery of each image to your application.

Compact Design with Locking Connectors

The compact design of the Lm075, measuring 44 x 44 x 56 mm, make it ideal for installation in small spaces or in compact enclosures. The fully locking USB 2.0 cabling and digital interface ensures a simple plug and play installation – and one standard cable minimizes camera clutter. No frame grabber required. Simplified and economical IO cabling is provided through a locking RJ45 connector supporting 2 optically isolated ports (1IN/1OUT) and 3 configurative bi-directional I/O ports.

Write Your Own Vision Application

The Lumenera Camera SDK provides a full suite of features and functions that allow you to maximize the performance of your camera within your application. The SDK is compatible with all USB and GigE based cameras. Microsoft DirectX/DirectShow, Windows API and .NET API interfaces are provided allowing you the choice of application development environments from C/C++ to VB.NET or C#.NET. Full inline IntelliSense autocompletion and documentation is provided with the .NET API interface and is accompanied by a full API manual describing all the camera functions and properties.

Features


- Small form factor measuring 44 x 44 x 56 mm
- High quality Sony HAD ICX424 CCD sensor
- Color, interline transfer, progressive scan VGA CCD sensor
- Locking industrial mini USB and RJ45 GPI/O connector for control of peripherals and synchronization of lighting
- 3 software configurable bidirectional I/O ports and 2 optically isolated ports (1in/1out)
- 32 MB RAM frame buffer
- Excellent sensitivity
- Simplified cabling - video, power and full camera control over a single mini USB cable
- 8 mounting points
- Binning and Region of Interest (ROI) options improve sensitivity and provide higher frame rates
- FCC Class B, CE Certified
- Select 8 or 12-bit pixel data
- DirectX/DirectShow compatible
- Software compatible with Windows 10, Windows 8.1, Windows 7, Linux, 32 and 64-bit operating systems
- Complete SDK available
- Four (4) year warranty



7 CAPELLA COURT, OTTAWA, ON, CANADA K2E 8A7 | TEL (613) 736-4077 | FAX (613) 736-4071 | WWW.LUMENERA.COM | INFO@LUMENERA.COM

© 2018 Lumenera Corporation. All rights reserved.
Design, features, and specifications are subject to change without notice
02152018

Relative Sensor Responsivity- Color

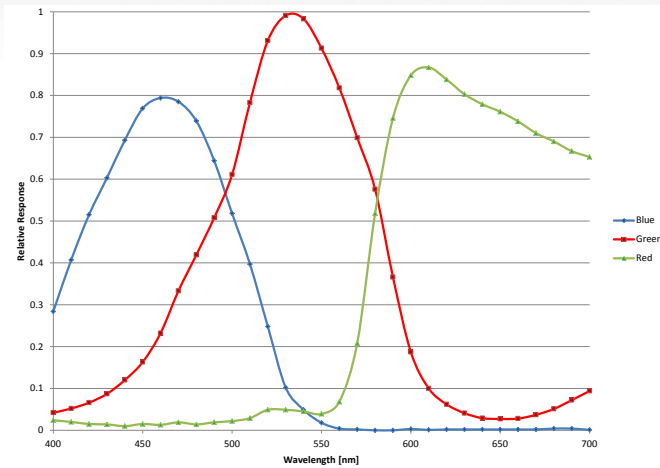


Ordering Options	
Lm070C	1.4 MP Mini Mini Color Camera Module (Board Level)
Lm075C	1.4 MP Mini Color Camera (Enclosed)
LuSDK	Software Developer's Kit (web download)
Camera Includes	
Lu802m	Locking 2M USB 2.0 A to mini B cable
Lu906	Tripod mount
Customization Options	
-WOIR	Without IR Cut Filter (in optical path)
-WIR	With IR Cut Filter (in optical path)
-CS	With Adjustable CS-mount Lens Mount

Sensor Specifications	
Image Sensor	Sony ICX424AQ, HAD CCD, color, progressive scan
Optical Format	1/3"
Imager Size	Diagonal 6.00 mm
Pixel Size	7.4 x 7.4 μ m
Resolution	640 x 480 pixels
Region of Interest Control	Any multiple of 8 x 8 pixels, 24 x 16 pixels minimum
Camera Specifications	
Frame Rate	60 fps 112 fps at 320 x 240 (at 2x binning or with ROI)
Bit Depth	8 or 12-bits
Binning Modes	2 x 2 and 4 x 4
Exposure Control	Manual and automatic control
Exposure Range	33.5 μ s - 133.5ms (video), 33.5 μ s - 4.3s (snapshot)
Gain Control	Manual and automatic control
Gain Range	1 to 23.815 X
White Balance	Manual and automatic control
Camera Characteristics	
Sensitivity	0.1 lux @ F10
Dynamic Range	65 dB
Pixel Well Depth	42,000 e-
Signal To Noise Ratio	8 bits color
Read Noise	10 e-
Dark Current Noise	<0.01 e-/s @25 $^{\circ}$ C
Mechanical Specifications	
Data Interface	USB 2.0, locking mini-B connector
Lens Mount	Adjustable C-mount standard (optional adjustable CS-mount available)
Dimensions (HxWxD)	45.47 x 43.94 x 43.94 mm (enclosed) 1.79 x 1.73 x 1.73 inches (enclosed)
Mass	130 g (enclosed)
Operating Temperature	0 to 50 $^{\circ}$ C
Storage Temperature	-30 to 70 $^{\circ}$ C
Operating Humidity	5 to 95 %
Shock / Vibration	50 g shock, 5 g (2 to 200 Hz) vibration
Onboard Memory	Camera has onboard non-volatile memory storage
Camera Software	
Operating Systems	Windows 10, Windows 8.1, Windows 7, Linux, 32 and 64-bit operating systems
Software Interfaces	Windows API, NET, DirectX
Power and Emissions	
Power Consumption	~2.5 W
Power Requirement	USB bus power only
Emissions Compliances	FCC Class BE, CE Certified
Hazardous Materials	RoHS, WEEE Compliant
Warranty	Four (4) year
System Requirements	
Recommended PC Specs	<ul style="list-style-type: none"> Pentium 4, 1.3 GHz or higher 512 Mb RAM 60 MB hard drive free space or more USB 2.0 Port Windows 10, 8.1, 7; Linux



Enclosed Mechanical Drawings

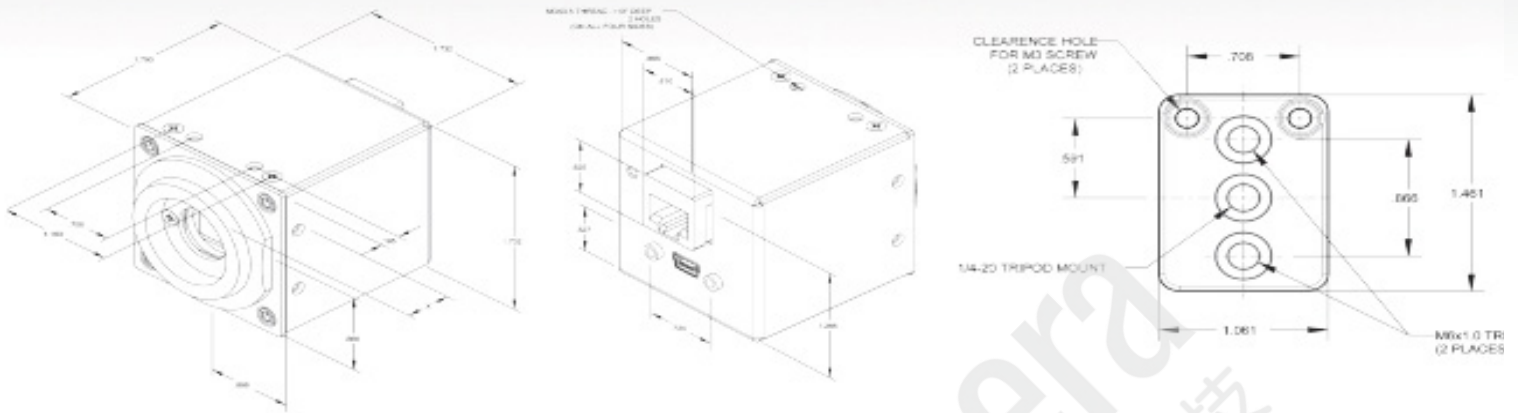

Board Level Mechanical Drawings

