LXC-120C

Camera Link, 12 Megapixel, Color

Article number: 11148664

Overview

- 4096 × 3072 px
- ams (CMOSIS) CMV12000
- APS-C CMOS
- 63 fps
- Camera Link Full
- Phase-Out starting 08/20, alternative via sales

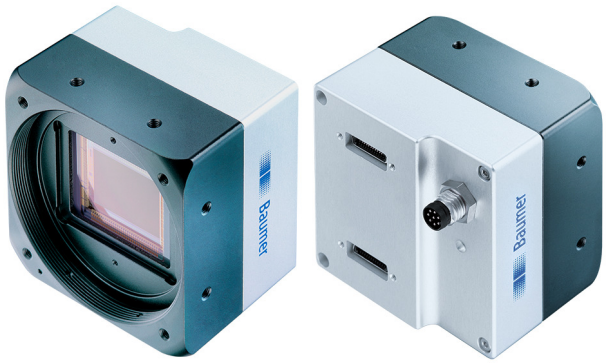

Technical data

Sensor information	
Sensor	ams (CMOSIS) CMV12000
Resolution	4096 × 3072 px
Exposure time	0,02 … 1000 ms
Color filter	RGB Bayer Mosaic
Pixel size	5.5 × 5.5 µm
Shutter type	Global shutter
Sensor type	APS-C CMOS
Acquisition formats	
Image formats, interface frame rate max.	Full Frame, 4096 × 3072 px, max. 63 fps
Pixel formats	BayerGB8 BayerGB10
Image preprocessing	
Analog controls	Gain (0 … 12 dB) Offset (0 … 63 LSB 10 Bit)
Color models	Raw Bayer
Color processing	NA
Camera features	
Synchronization	free running trigger
Trigger sources	Hardware Software ActionCommand
Trigger delay	0 … 2 sec, tracking and buffering of up to 256 trigger signals
Sequencer	Automated control for series of images using different sets of parameters

Camera features	
Sequencer parameter	Exposure time gain factor Output ROI Offset x ROI Offset y
Digital inputs	1 input line
Digital outputs	1 output line
Internal image buffer	512 MB
Interfaces and connectors	
Data interface	Camera Link Full, connector: 2 x Standard SDR26 (Mini CL)
Process interface	M8 / 8 pins
Power supply	via M8 / 8 pins
Mechanical data	
Lens mount	M58-mount (F-mount, M42, C-mount via adapter)
Width	60 mm
Height	60 mm
Depth	43,05 mm
Weight	≤ 235 g (M58-mount)
Material	housing: aluminum
Electrical data	
Voltage supply range +Vs	12 … 24 V DC (external power supply) 38 … 57 V (PoCL)
Power consumption	approx. 6,5 W @ 24 VDC approx. 6,5 W @ 12 VDC (PoCL)

LXC-120C

Camera Link, 12 Megapixel, Color

Article number: 11148664

Technical data

Non-volatile memory	
Flash memory size	128 kB
Environmental conditions	
Operating temperature	+5 … +65 °C @ T = measurement point
Humidity	10 … 90 % (non-condensing)

Environmental conditions	
Protection class	IP 40
Conformity	
Conformity	CE RoHS EAC

Dimension drawing