

ML-M1618HR


ML-M-HR series

Drawing No. A23076







		Lens Type	CCTV Lens	
		Focus Position	Reference Magnification	M.O.D
		Magnification	0.031	0.076
(mm)		Focal Length	15.99	15.99
Fno		Fno	1.80	16.00
NA		Numerical Aperture	-	-
WD/OD (mm)		Working/Object Distance	500.0 / 508.4	200.0 / 208.4
O/I (mm)		Object to Image Distance	549.81	250.53
(mm)		Mechanical Tube Length	31.8	35.0
(mm)		Lens Back	11.61	12.33
(mm)		DOF @PCoC 0.04mm	156.763	27.316
(μ m)		Resolution @ $\lambda=550$ nm	-	-
/	(mm)	Front/Rear Principal Position	17.05 / -4.82	17.05 / -4.82
/	(mm)	Entrance/Exit Pupil Position	12.15 / -11.89	12.15 / -11.89
/	(mm)	Entrance/Exit Pupil Diameter	8.89 / 12.81	8.89 / 12.81
(deg.)	H x V	Angle Of View	30.36 x 22.90	29.67 x 22.43
TV	(%)	TV Distortion	-0.113	-0.141
	(%)	Relative Illumination	65.43	68.20
(g)		Weight	50	
		Mount	C mount	
	(mm)	Image Circle	11	
		Largest Compatible Camera	2/3 Inch	

ML-M1618HR

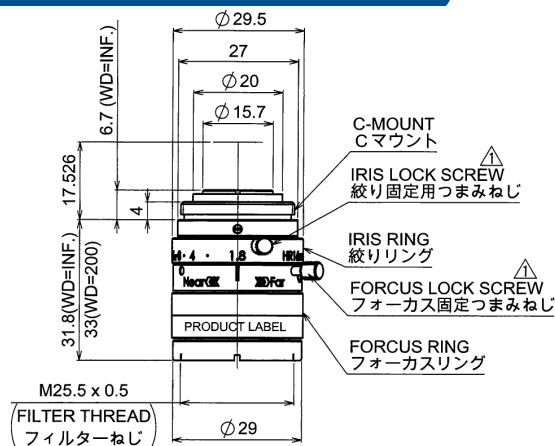

WD=500.0mm Fno2.8

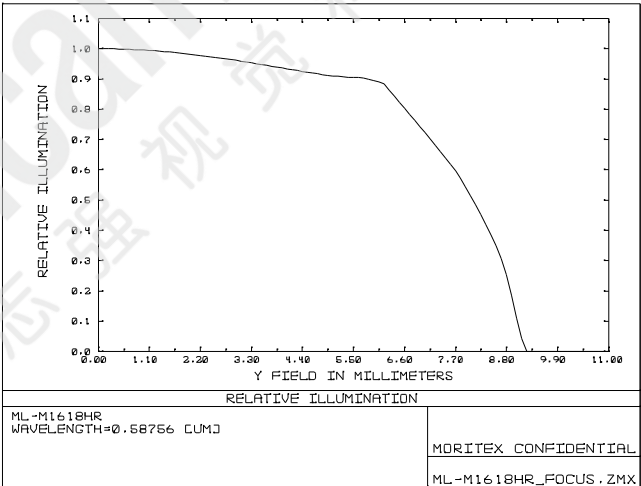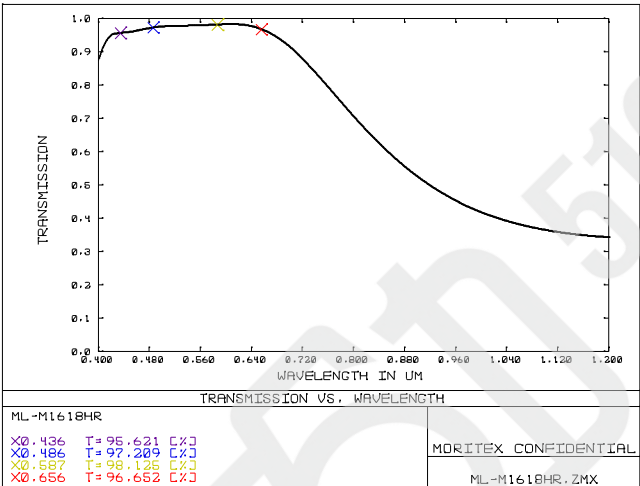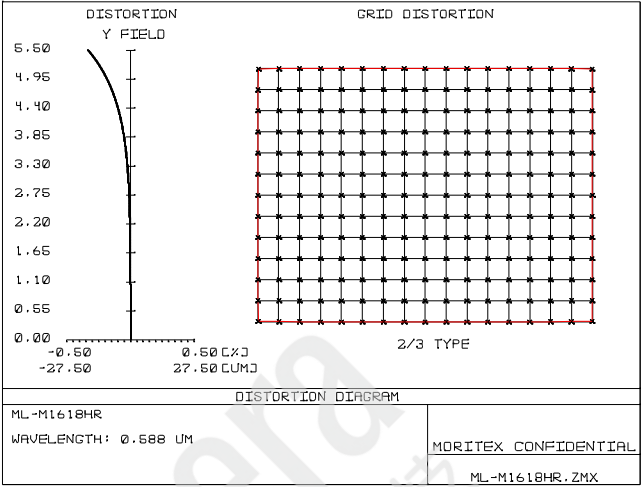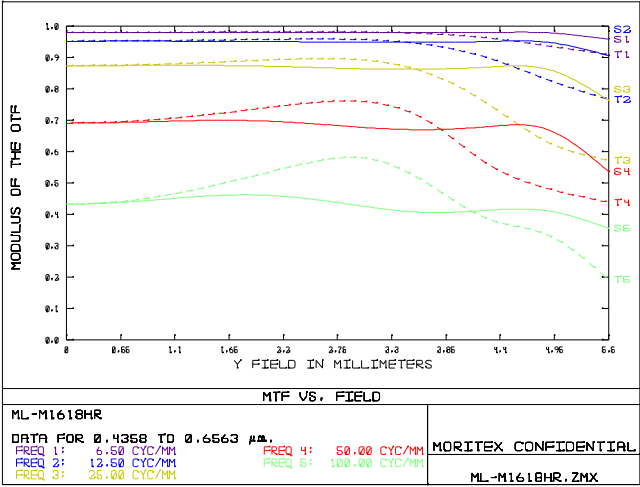





The content is subject to change at any time without notification.

株式会社 **モリテックス** **MORITEX Corporation**

Technology center Lens design & Development technology
 TEL +81 (0)48-218-2536 moritex.mvs@moritex.com
 FAX +81 (0)48-462-6713 www.moritex.com



WD=300.0mm Fno2.8

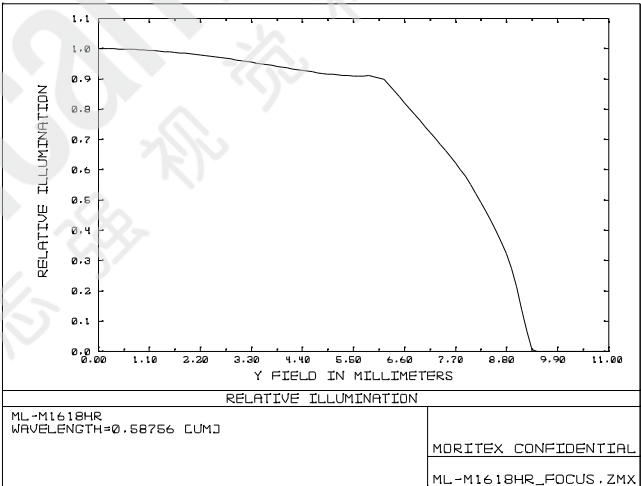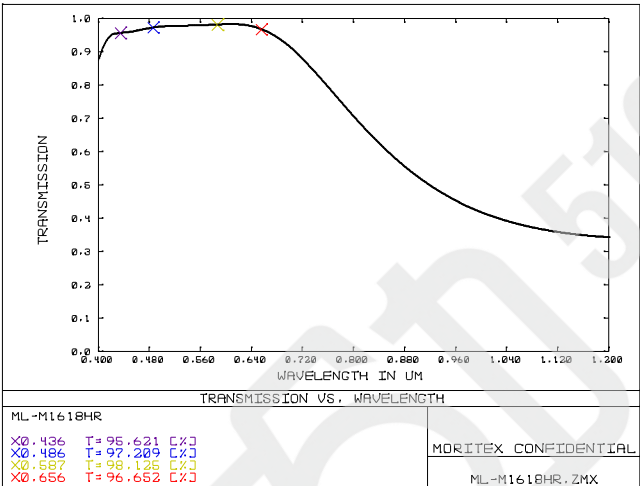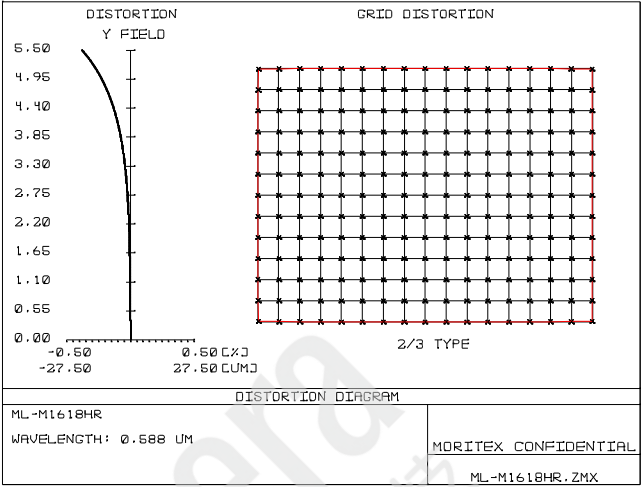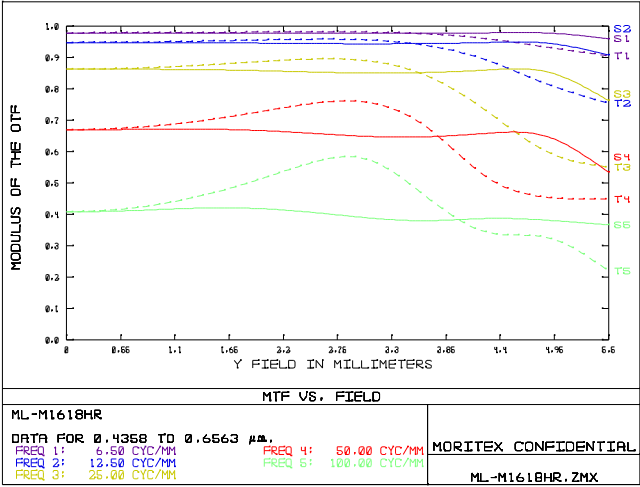





The content is subject to change at any time without notification.

株式会社 **モリテックス** **MORITEX Corporation**

Technology center Lens design & Development technology
 TEL +81 (0)48-218-2536 moritex.mvs@moritex.com
 FAX +81 (0)48-462-6713 www.moritex.com



WD=200.0mm Fno2.8

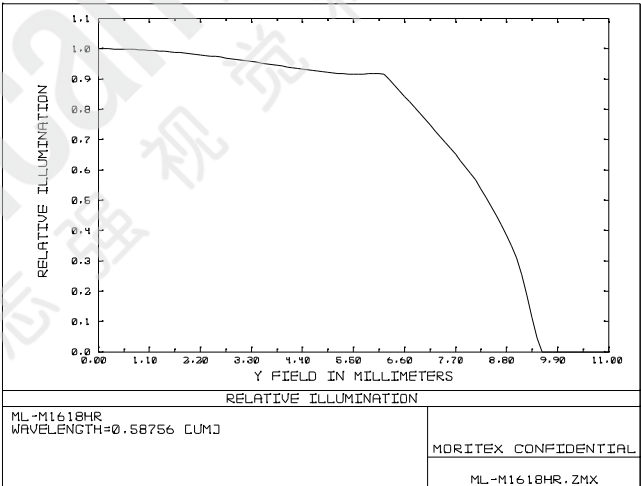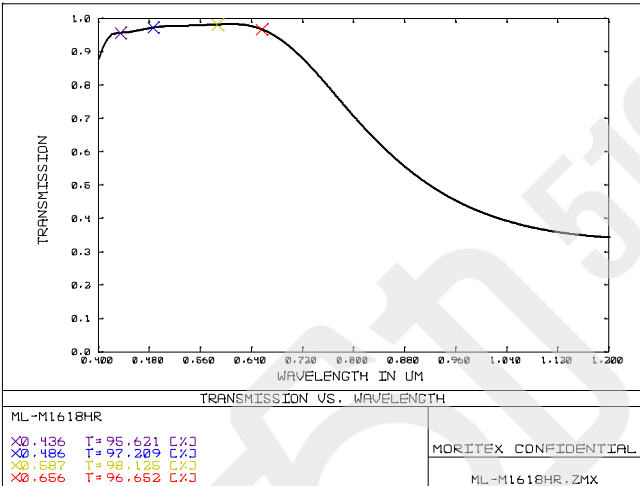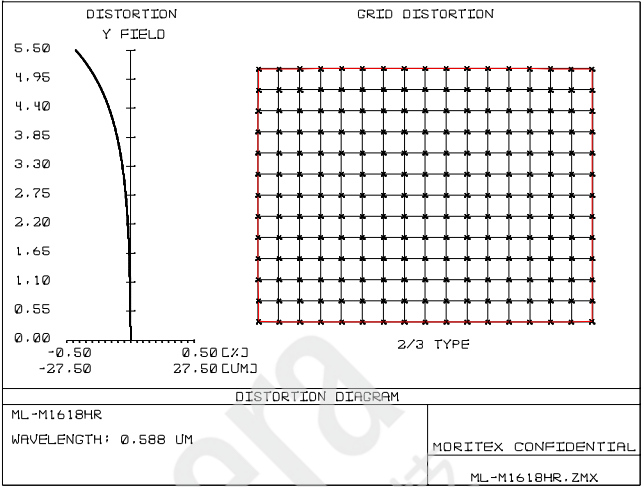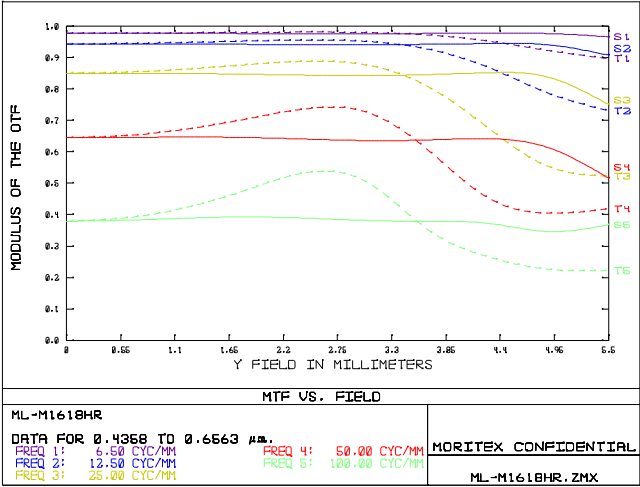

The content is subject to change at any time without notification.

株式会社 **モリテックス** MORITEX Corporation

Technology center Lens design & Development technology
 TEL +81 (0)48-218-2536 moritex.mvs@moritex.com
 FAX +81 (0)48-462-6713 www.moritex.com

