


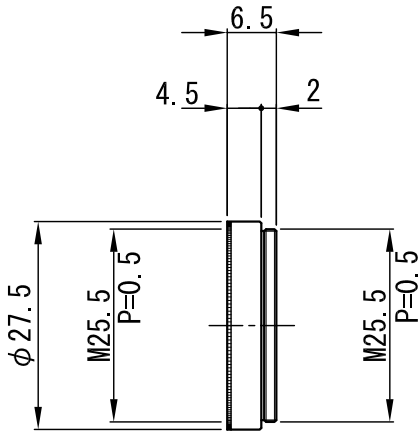

※下記機種は外観寸法共通
SV-UV330-255、SV-IR255、SV-R64-255、SV-B440-255、SV-VC700-255、SV-VC800-255

△×				APPROVED	CHECKED	MATERIAL 材料				—		CHAMFER 一般面取		—		QUANTITY 個数		
△×				S. U.	S. U.	TREATMENT 処理				—		FINISHING 仕上		—		—		
△×						TREATMENT CONTACT 処理接点				—		DECENTRATION 偏芯		—				
△×				DESIGNED	DRAWN	OVER 250 UP TO 1000 ±0.3 ±0.5 ±1.0 ±0.2				UNIT (mm)	ANGLE 角度	METHOD 図法	REMARK 適用（機種名）					
△×						OVER 63 UP TO 250 ±0.2 ±0.3 ±0.6 ±0.15					—		SV-□□□-255 (UV_IR_R64_B_VCseries)					
△×						OVER 16 UP TO 63 ±0.1 ±0.2 ±0.4 ±0.1					SCALE	1 / 1		NAME	外 観 図			
△×						OVER 0 UP TO 16 ±0.05 ±0.1 ±0.2 ±0.1								DRAW NO.		0 D F L 0 0 9 2 A 1		
NO.×箇所	REVISION 訂正事項	DATE	NAME	S. U.	M. M.	TOLERANCES A B C S				DATE	' 17.07.04		DRAW NO.		0 D F L 0 0 9 2 A 1			