


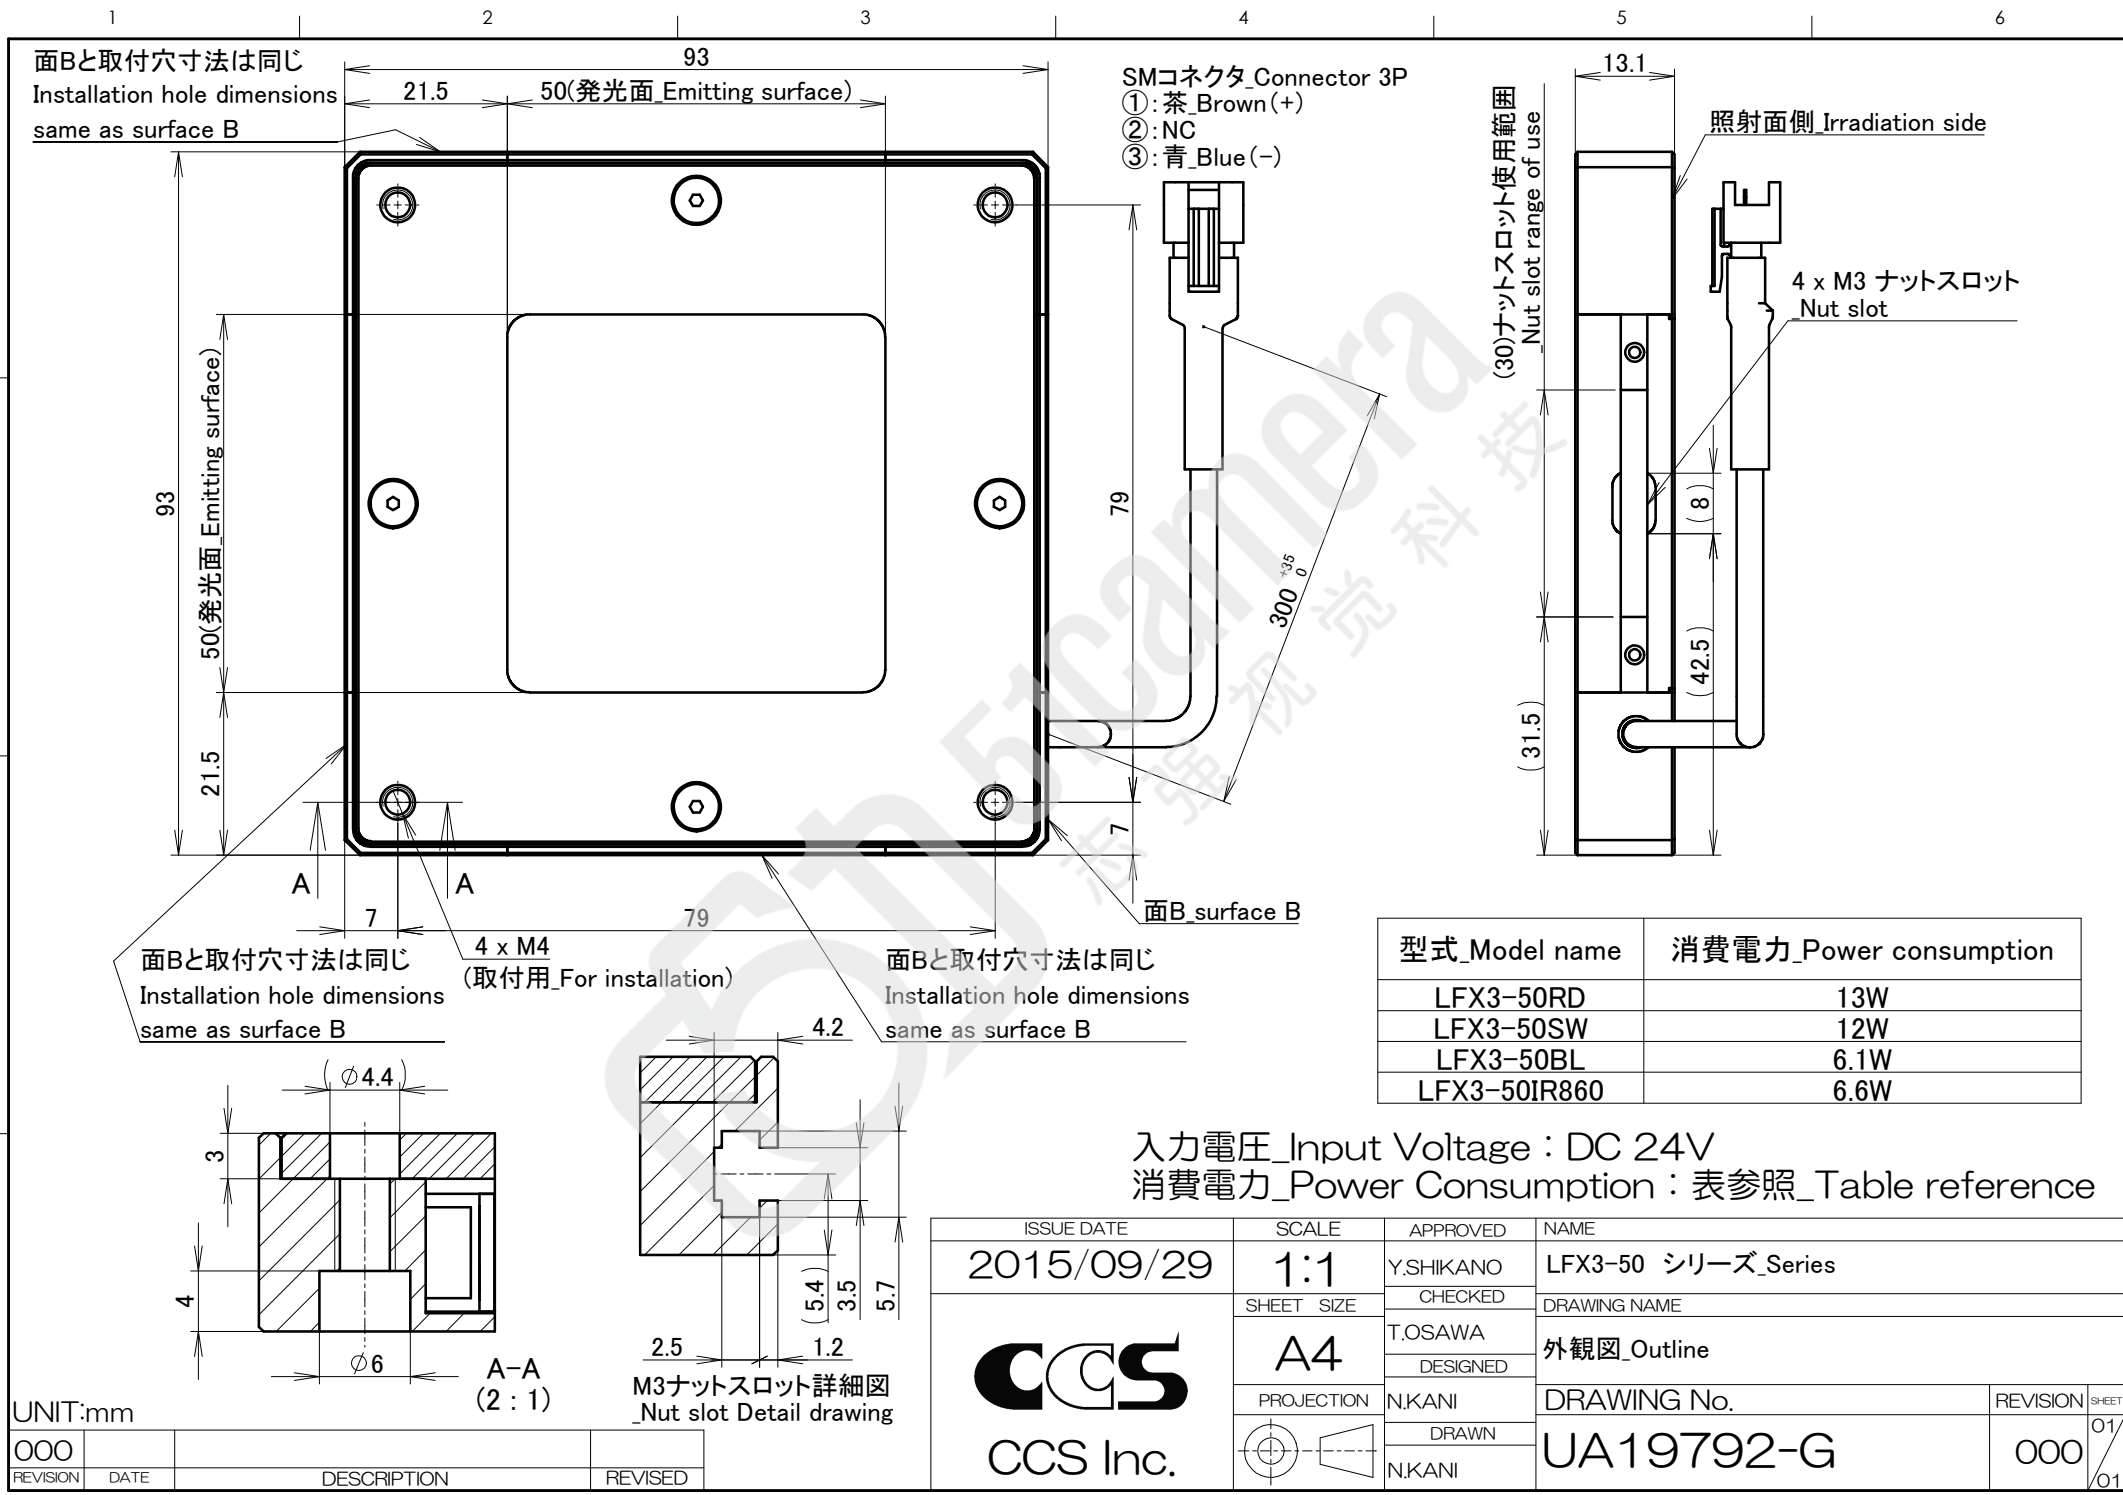

面Bと取付穴寸法は同じ
Installation hole dimensions
same as surface B

SMコネクタ_Connector 3P
①: 茶_Brown(+)
②: NC
③: 青_Blue(-)

(30)ナットスロット使用範囲
Nut slot range of use

照射面側_Irradiation side

4 x M3 ナットスロット
Nut slot

93
50(発光面_Emitting surface)
21.5

79

300⁺³⁵₀

(31.5)

(8)

(42.5)

A

A

79


面B surface B

面Bと取付穴寸法は同じ
Installation hole dimensions
same as surface B


4 x M4
(取付用_For installation)

面Bと取付穴寸法は同じ
Installation hole dimensions
same as surface B

4.2



A-A
(2 : 1)



M3ナットスロット詳細図
Nut slot Detail drawing

型式_Model name	消費電力_Power consumption
LFX3-50RD	13W
LFX3-50SW	12W
LFX3-50BL	6.1W
LFX3-50IR860	6.6W

入力電圧_Input Voltage : DC 24V
消費電力_Power Consumption : 表参照_Table reference

UNIT:mm

REVISION	DATE	DESCRIPTION	REVISED
000			

ISSUE DATE	SCALE	APPROVED	NAME
2015/09/29	1:1	Y.SHIKANO	LFX3-50 シリーズ_Series
	SHEET SIZE	CHECKED	DRAWING NAME
	A4	T.OSAWA	外観図_Outline
	PROJECTION	DESIGNED	DRAWING No.
		DRAWN	UA19792-G
			REVISION SHEET
			000 01/01