

# VZ-2MG-M/C 41H00

Industrial Digital Cameras with GigE Interface



**GigE**  
VISION

**GEN<I>CAM**

VZ-2MG-M/C 41H00, the new industrial GigE vision camera with improved built-in ISP algorithms provides multiple acquisition controls. Thanks to the extremely compact design (29mm x 29mm x 40.3mm), robust metal housings and locking screw connectors, the VZ-2MG-M/C 41H00 camera can secure the reliability of cameras deployed in harsh environments.

VZ-2MG-M/C 41H00 has opto-isolated I/Os, and the GPIOs give the camera maximum flexibility to adapt to specific needs. The VZ-2MG-M/C 41H00 camera is ideal for machine vision applications such as industrial inspection, medical, scientific research, education, security and so on.

**vieworks**


[vision.vieworks.com](http://vision.vieworks.com)

# VZ-2MG-M/C 41H00

Industrial Digital Camera with GigE Interface

## Mechanical Dimensions

Unit: mm

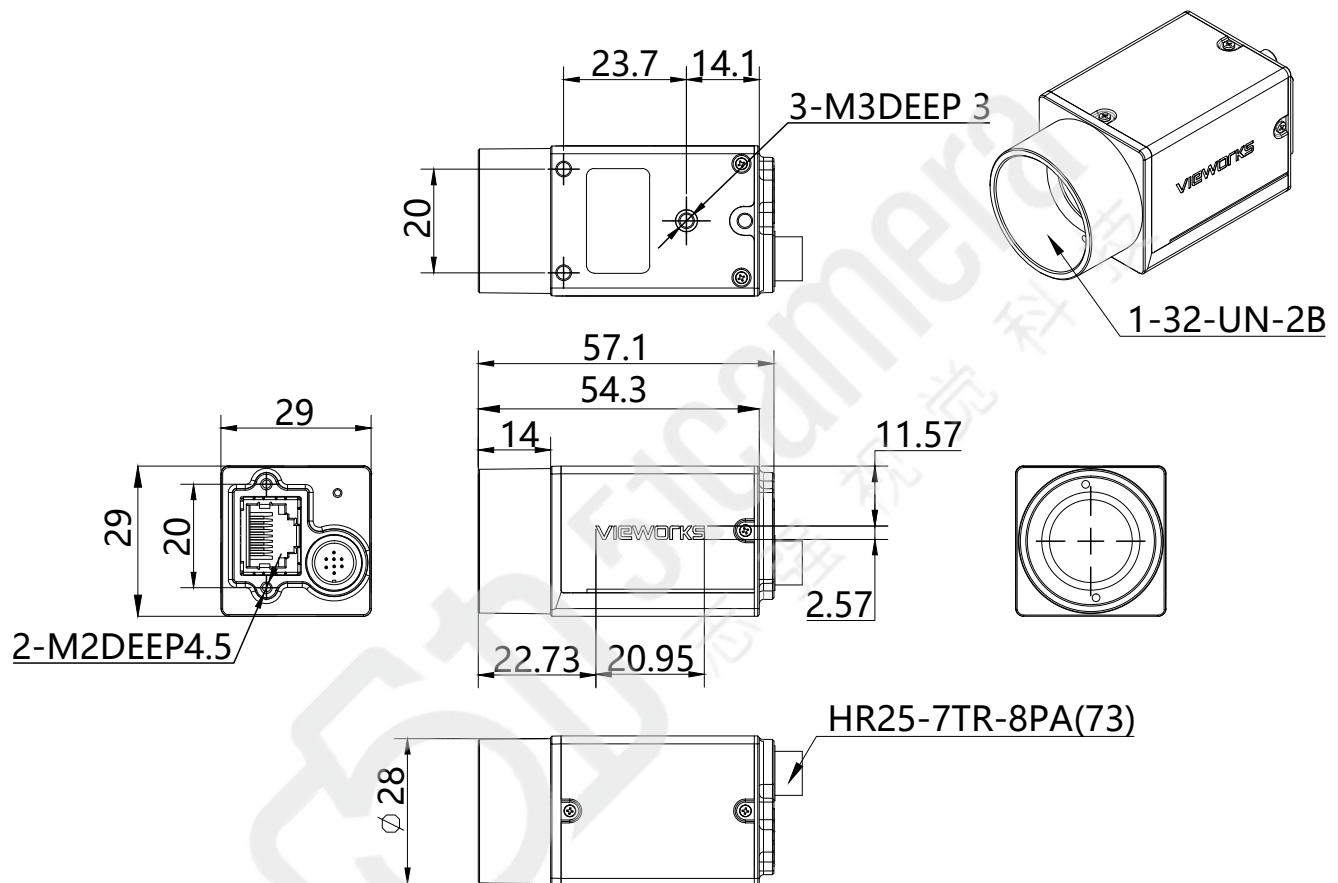

## Industrial Digital Camera with GigE Interface

- Power over Ethernet (IEEE802.3af)
- Programmable ROI, increased frame rate with partial scan
- Programmable LUTs and storable user sets
- 4 acquisition controls: single frame, continuous, software trigger, external trigger
- Adjustable Gamma and Sharpness for optimizing the brightness and sharpness of images
- Support Remove Parameter Limit to expand the range of exposure, gain, white balance, etc.
- Compatible with GenICam™ and GigE Vision

- Industrial Inspection
- Medical Research
- Scientific Research
- Education
- Security


Model	VZ-2MG-M/C 41H00	
Resolution (H x V)	1920 x 1200	
Sensor	1/1.2" Sony IMX249 Global Shutter CMOS	
Pixel Size	5.86 μm × 5.86 μm	
Data Interface	Fast Ethernet (100 Mbit/s) or Gigabit Ethernet (1000 Mbit/s)	
Frame Rate	41fps @ 1920 x 1200	
ADC Bit Depth	12 bit	
Pixel Bit Depth	8 bit, 12 bit	
Exposure Time	Standard: 20μs to 1s Actual Steps: 1 row period	
Gain	0dB to 24dB	
Mono / Color	Color	Mono
Pixel Formats	Bayer RG8, Bayer RG12	Mono8, Mono12
Signal Noise Ratio	Color: 44.8dB / Mono: 44.83dB	
Synchronization	Hardware trigger and Software trigger	
I/O	1 input and 1 output with opto-isolated, 2 programmable GPIOs	
Temperature	Operating: 0°C to 45°C, Storage: -20°C to 70°C	
Operating Humidity	10% to 80%	
Power Requirements	PoE (Power over Ethernet, IEEE802.3af compliant) or 12 VDC-10% ~ 24 VDC+10% supplied via the camera's Hirose connector	
Power Consumption	PoE (Power over Ethernet, IEEE802.3af compliant) or 12 VDC-10% ~ 24 < 3 W @ 24 VDC, < 3.75 W @ PoE	
Lens Mount	C	
Dimensions and Weight	29mm x 29mm x 40.3mm, 83g	
Programmable Control	Image size, Gain, Exposure time, Trigger polarity, Flash polarity	
Conformity	CE, RoHS, FCC, GigE Vision, GenICam, KC	

# VZ-2MG-M/C 41H00


Industrial Digital Camera with GigE Interface

## Spectral Response


- VZ-2MG-M41H00 (Mono)

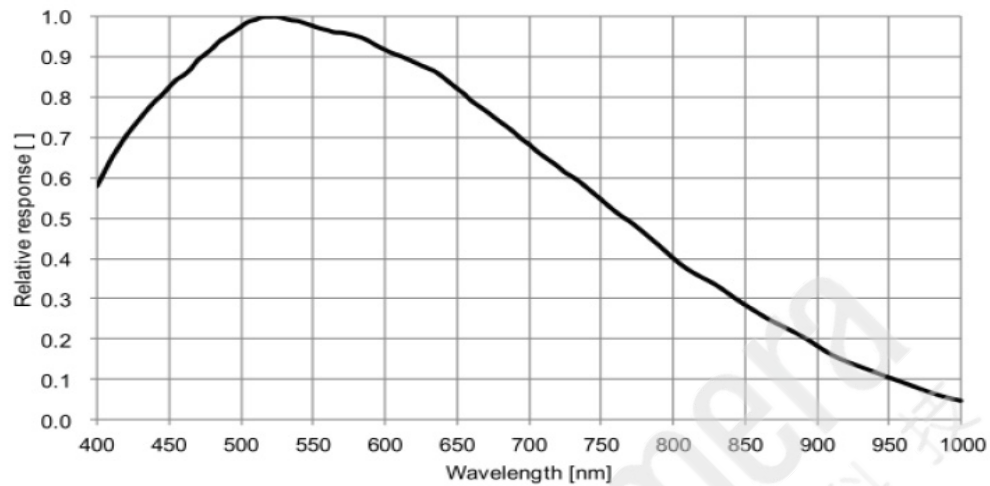

- VZ-2MG-C41H00 (Color)

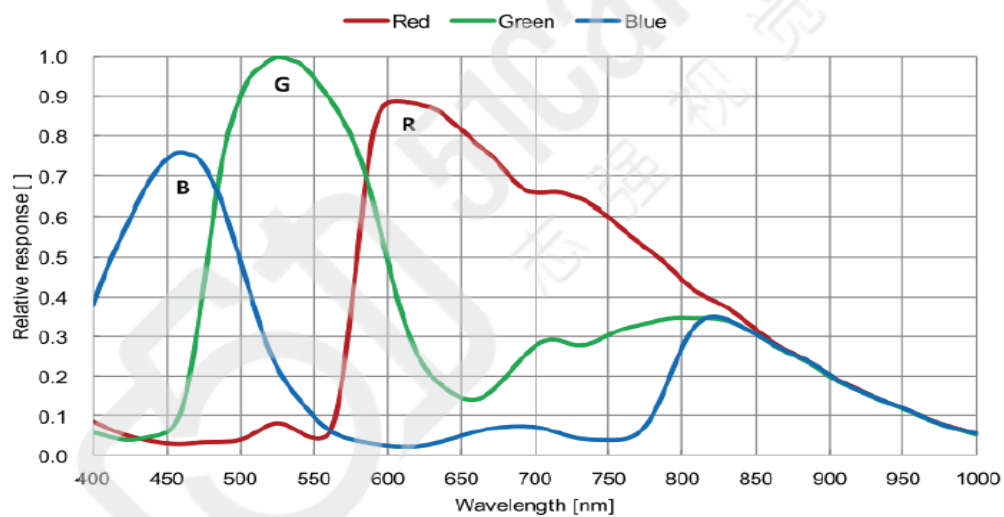

## Ordering Scheme

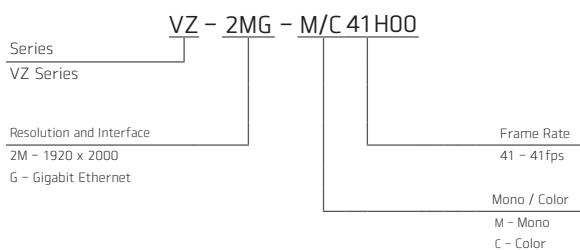

## Connector Specification

Power/Control



- |             |   |
|-------------|---|
| 1: Line0+   | Opto-isolated input+                      |
| 2: Ground   | GND & GPIO GND                            |
| 3: Line0-   | Opto-isolated input-                      |
| 4: POWER_IN | Camera external power (+12 VDC ~ +24 VDC) |
| 5: Line2    | GPIO input/output                         |
| 6: Line3    | GPIO input/output                         |
| 7: Line1-   | Opto-isolated input-                      |
| 8: Line1+   | Opto-isolated input+                      |

Connectors on camera body